




“ DESIGNED TO LEAD .. BUILT TO LAST ..”

MCV 230 – MCV 220



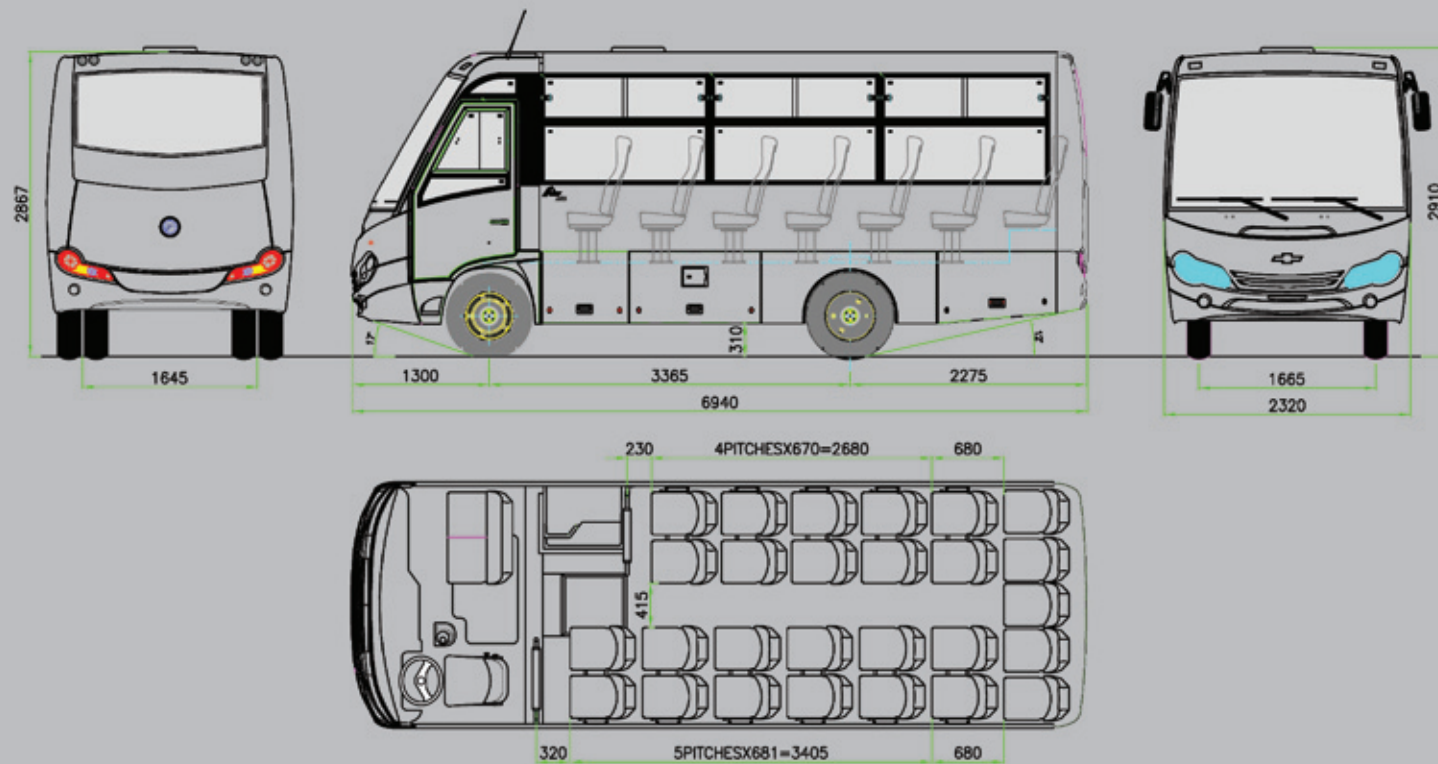


Standard body specs		MCV 220 (ISUZU NPR chassis)		
		MCV 220C (City)	MCV 220R (Regular)	MCV 220L (Luxury)
Dimensions				
	Overall length (mm)	6,940		
	Overall width (mm)	2,320		
	Overall height (mm)	2,910 (3,040 with A/C.)		
	Wheel base (mm)	3,365		
Number of passengers		29 seated		
Luggage capacity (cubic m.)		1.5		
Doors				
	Driver & Courier doors	Standard		
	Passengers door	Foldable electrically controlled		
Windows				
	side windows	Sliding		Fixed
Seats				
	Number off	29 + driver		
	Type	Fixed high back rest		
Accessories				
	Air conditioning (A/C.)	None	None	A/C. with air outlet & light for each seat
	Parcel Rack	None	None	Standard
	Radio cassette & speakers	Standard		
	Roof grab rail	One	None	None
Available Options				
		Parcel Rack	A/C. With air outlets for each seat	Sliding side windows
		2 roof grab rails		DVD & one monitor
			Parcel Rack	Fridge
			one roof grab rail	(2 seats to be removed)
			DVD & one monitor	
In case of any vehicle equipped with A/C , Alternator will be 80 (Amp.)				

In case of any vehicle equipped with A/C, Alternator will be 80 [Amp.]

Chassis Model		(NPR66LL-5LYB)
GVW (ton)		7
Wheel Base (mm)		3,365
Engine		ISUZU 4HF1
Max Power (kw)	Displacement (L)	4.3
	Emission Level	Euro 1
	Max Power (ps)	88 @ 3,200 rpm
Max Torque (N.m.)	Max Power (ps)	120 @ 3,200 rpm
	Max Torque (N.m.)	285 @ 1,800 rpm
	Max Torque (kg.m.)	29 @ 1,800 rpm
Transmission		Manual gearbox with 5 forward speeds & 1 reverse speed
Brakes	Service brake (Front & Rear)	Drum type, dual circuit vacuum assisted tandem master
	Parking brake	Mechanically operated
Axles		Rigid type
Suspension		Semi elliptical, alloy steel tapered leaf springs, with double acting telescopic shock absorbers & stabilizer
Tire		7.50-16-14
Fuel Tank Capacity (L)		100
Electric System (Volts)		24
Alternator (Amp.)		50

MCV 220

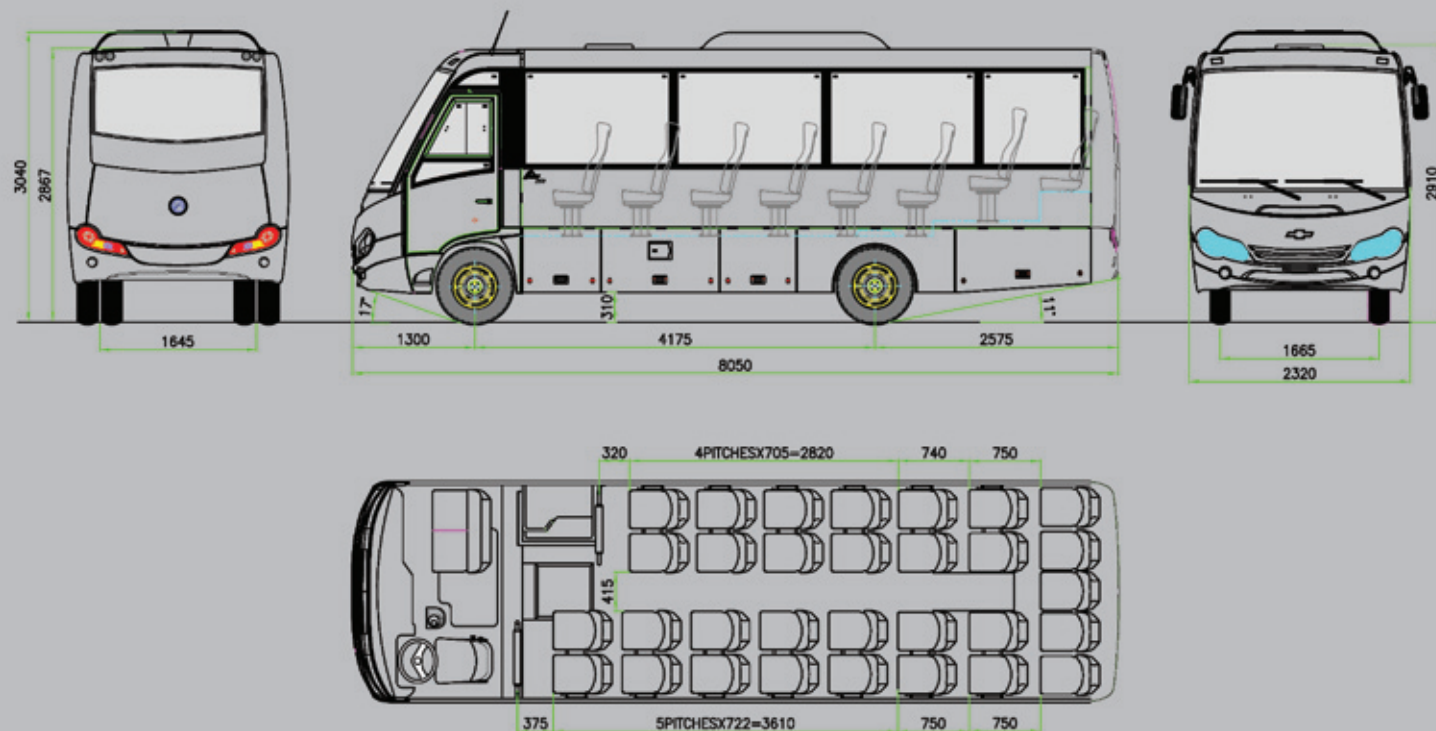

Standard body specs		MCV 230 (Isuzu NQR chassis)		
		MCV 230C (City)	MCV 230R (Regular)	MCV 230L (Luxury)
Dimensions				
Overall length (mm)		8,050		
Overall width (mm)		2,320		
Overall height (mm)		2,910 (3,040 with A/C.)		
Wheel base (mm)		4,175		
Number of passengers		33 seated		
Luggage capacity (cubic m.)		3		
Doors				
Driver & Courier doors		Standard		
Passengers door		Foldable electrically controlled		
Windows				
side windows		Sliding		Fixed
Seats				
Number off		33 + driver		
Type		Fixed high back rest		Reclinable back rest
Accessories				
Air conditioning (A/C.)		None	None	A/C. with air outlet & light for each seat
Parcel Rack		None	None	Standard
Radio cassette & speakers		Standard		
Roof grab rail		One	None	None
Available Options				
		Parcel Rack	A/C. With air outlets for each seat	Sliding side windows
		2 roof grab rails		DVD & one monitor
			Parcel Rack	Fridge
			one roof grab rail	(2 seats to be removed)
			DVD & one monitor	

In case of any vehicle equipped with A/C, Alternator will be 80 (Amp.)

Chassis Model		NQR71RBL-SLVYB
GVW (ton)		8
Wheel Base (mm)		4,175
Engine		ISUZU 4HG1
		Displacement (L)
		4.6
		Emission Level
		Euro 1
Max Power (kw)		89 @ 3,200 rpm
(ps)		121 @ 3,200 rpm
Max Torque (N.m.)		304 @ 1,600 rpm
(kg.m.)		31 @ 1,600 rpm
Transmission		Manual gearbox with 5 forward speeds & 1 reverse speed
Brakes	Service brake (Front & Rear)	Drum type, dual circuit vacuum assisted tandem master
	Parking brake	Mechanically operated
Axles		Rigid type
Suspension	Front & Rear	Semi elliptical, alloy steel tapered leaf springs, with double acting telescopic shock absorbers & stabilizer
Tire		7.50-16-14
Fuel Tank Capacity (L)		100
Electric System (Volts)		24
Alternator (Amp.)		60



MCV 230



www.mcv-eg.com